

上海钦凯实业有限公司

Shanghai Qinkai Industrial Co.,Ltd

SELECTION GUIDE
选型手册



Company 公司简介

Introduction

上海钦凯实业有限公司，注册资金一千多万人民币。是专业生产管道及电气支吊架系统，电缆支架系统，型钢支架系统,标准件以及各类钢材销售一体的公司。

产品主要广泛用于工程建筑，火电,核电等行业。致力服务于国内外各大知名客户。其中国外客户主要集中在澳洲，南美洲，北美洲，东南亚,巴基斯坦等国家。规模性的工程有：澳大利亚机场,香港地铁站，中国浙江三门核电站等。

工厂拥有各类先进的加工设备和完善的检验程序，始终致力于质量第一，服务第一的观念。以“质量求生存，科技求发展”开创一流的企业，生产一流的产品，提供一流的服务为宗旨。钦凯在不断发展的道路上，希望得到各界海内外人士的大力支持。


Shanghai Qinkai Industrial Co. Ltd. is registered capital to be ten million yuan. Is a professional manufacturer of electrical , mechanical & pipe support system.

Products are widely used in engineering construction, thermal power, nuclear power and other industries. Committed to serving the major domestic and foreign well-known customers. Foreign customers are mainly concentrated in Australia, South American, North American, Southeast Asia, Pakistan and other countries. The famous project of our responsible have Australia airport, Hongkong subway station, China Zhejiang three nuclear power station and so on.

Our term of trained and professional personnel have had years of experience dealing with managing the process of design, quoting and expediting projects of all sizes.

For all products, services and up to date information, please contact us.



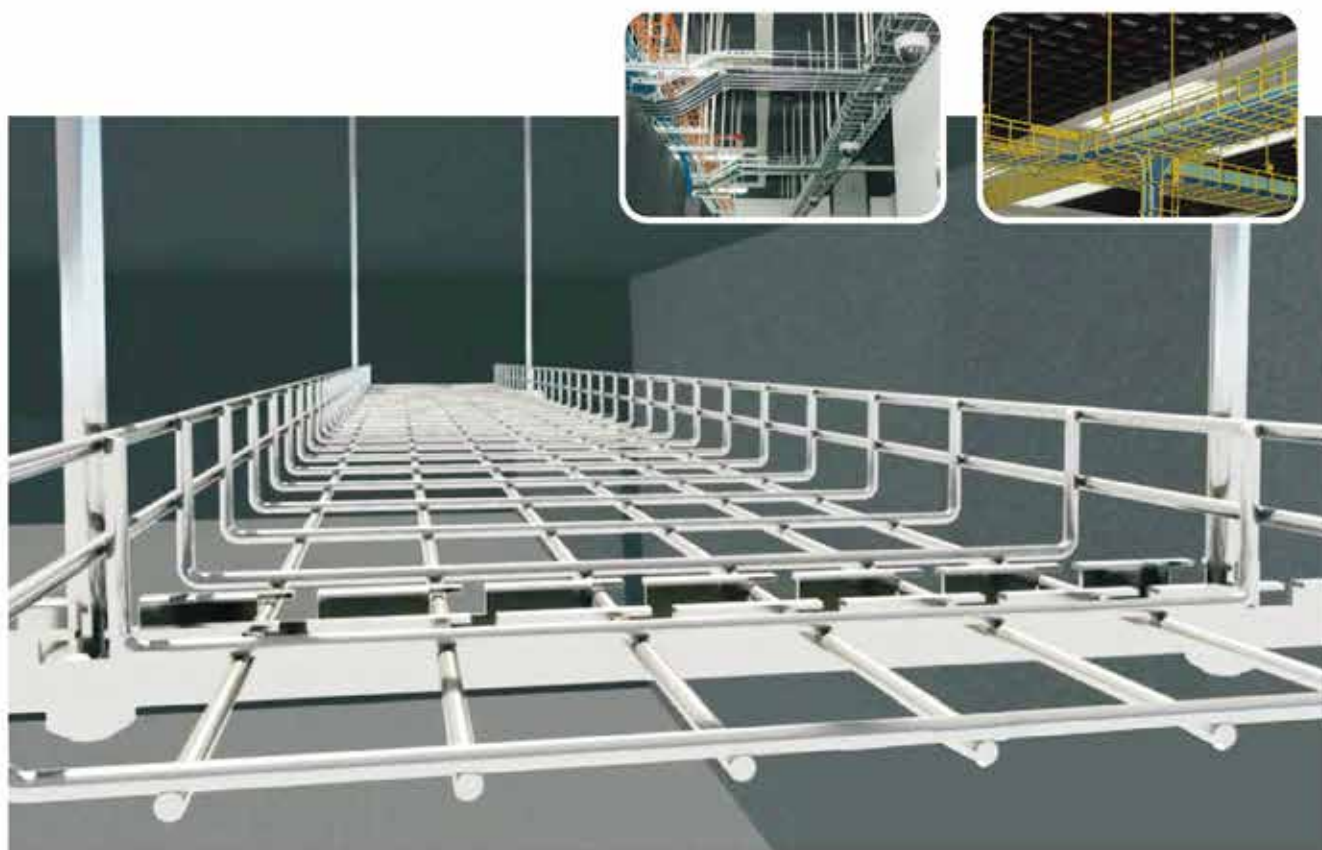

原材料钢丝的材质包括：Q195、Q235、304、316等。

表面处理：电镀锌（包括三价铬环保镀锌、六价铬镀锌、三价铬镀锌）、

电镀锌封闭、电镀锌镍合金、热浸锌、静电喷塑、电解抛光（不锈钢）。

The raw material wire steel: Q195、Q235、ss304、ss316 and so on.

Surface treatment: electro-galvanized、hot dipped galvanized、power coating and electrolytic polishing(stainless steel)

该产品具有以下优点 The product has the following advantages :

- 1、全新概念的网格桥架，装配灵活，外形美观，新颖独特，引人注目。
- 2、该产品适用于各种安装情况，布线维护和升级快速简单，能满足最苛刻的品质要求和安装标准。
- 3、该产品“容易成形”结构和“快装配件”显著减少桥架安装和电缆布线时间。
- 4、本产品能有效减少电磁干扰的影响。

1.New concept of mesh cable tray, flexible assembly, beautiful appearance, novel and unique, eye-catching.

2.The product is suitable for all kinds of installation, the wiring maintenance and upgrade is quick and simple, it can meet the strictest quality requirement and the installation standard.

3.The product has "easy formed" and "fast assembly parts installed" . It significantly reduces the time of installation of mesh cable tray and cable wiring

4. This product can effectively reduce the influence of electromagnetic interference.

技术参数 TECHNICAL PARAMETERS

材料、表面、应用场合 Materials & surface finish

产品材质 Materials	表面处理 Surface finishing	镀层厚度 Thickness of coating	应用场合 Application environment
碳钢Q195~Q235 Medium carbon steel	电镀锌 Electro-galvanized	$\geq 12\mu\text{m}$	室内 Indoor
	热镀锌 Hot Dip galvanized	$60\mu\text{m} \sim 100\mu\text{m}$	室内、室外 Indoor, Outdoor
	喷塑 Powder coating	$60\mu\text{m} \sim 100\mu\text{m}$	室内、有色彩要求 Indoor, need colors
不锈钢SS304	酸洗+抛光 Acid washing polishing	无	室内、室外 Indoor, Outdoor
不锈钢SS316/SS316L	酸洗+抛光 Acid washing polishing	无	任何高腐蚀场合 High corrosion occasions


外形尺寸 Dimensions

高度 Height(H) : 25mm, 50mm, 75mm, 100mm, 125mm, 150mm.....

宽度 Width(W) : 50mm ~ 1000mm

长度 Length(L) : 300mm ~ 3000mm

丝径 Diameter(D) : 3.5mm ~ 6.0mm

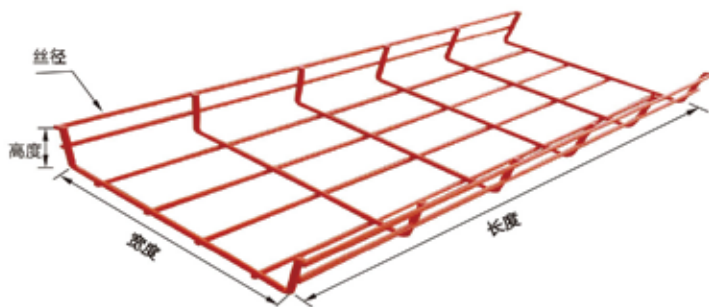

安装方式 Installations

直段拼接：选用达隆提供的连接件实现牢固的有栓连接，也可用无栓连接件实现快捷的连接。

弯头制作：可以安装现场的实际环境飞速制作转弯件，不论是水平弯、垂直弯，还是三通四通都能方便地实现。
详见本样栓后半部的弯头制作指南。

接地方式：因为除喷塑外的所有产品都是金属表面直接相边，所以接触电阻都小于0.2毫欧，具有极好的接地泄流特性。
喷塑产品则需要去除镀层次，再用连接配件连接以达到良好的接地效果。

Straight connected: choose connectors of Dalon to fix hard, or with no bolt.

Making bend: it can made fast at site. Whether horizontal bend. vertical bend or tee and cross.

Grounding method: the metal surface of all the products except power coating is connected, contact resistance is less than 0.2 mmho. It has a good grounding discharge advantage. The products with power coating must be deleted the zinc layer. Then it needs connectors to reach the effect.

技术参数 TECHNICAL PARAMETERS

安全承重数据 Safe Work Loading Test

按国际标准IEC：61537-2007进行承重测试

获得下图所示安全承重数据，实际最大承重数据是安全承重数据的2~3倍，
采用中频焊接技术，确保每个爆点更光滑、焊接牢度更强。


Test configuration is in compliance with standard IEC:61537-2007.

Right configure shows the safe work loading data. MAX Loading data is 2~3 times to safe work loading data
IF welding technology makes welding spot better strength.

网格桥架承重能力（公斤/每米）

Loading Capability of dalong wire baskets(Kg/merter)

DLCM50网格桥架 丝径5mm DLCM50 wire diameter=5mm		安全承重数据 Safe work loading			
		支撑间距 Span			
高度 Height(mm)	宽度 Width(mm)	1.0m	1.5m	2.0m	3.0m
50	50	91	70	47	23
50	100	99	76	51	25
50	200	103	79	53	26
50	300	111	85	57	28
50	400	120	92	61	31
50	500	129	99	66	33
50	600	137	105	70	35
50	700	144	111	74	37
50	800	152	117	78	39

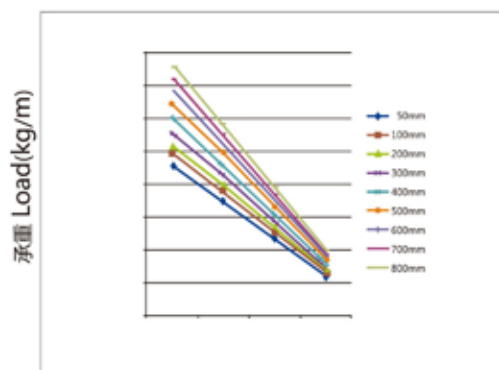


支撑间距 span

网格桥架承重能力（公斤/每米）

Loading Capability of dalong wire baskets(Kg/merter)

DLCM100网格桥架 丝径5mm DLCM100 wire diameter=5mm		安全承重数据 Safe work loading			
		支撑间距 Span			
高度 Height(mm)	宽度 Width(mm)	1.0m	1.5m	2.0m	3.0m
100	100	143	110	73	37
100	200	159	122	81	41
100	300	183	141	94	47
100	400	212	163	109	54
100	500	234	180	120	60
100	600	246	189	126	63
100	700	257	198	132	66
100	800	269	207	138	69

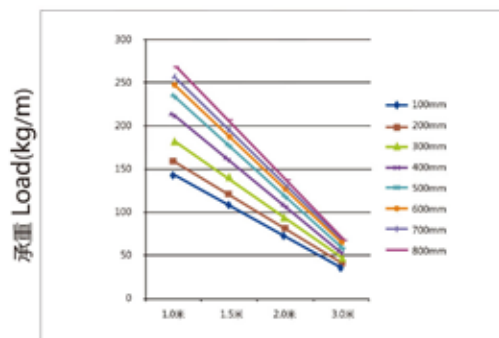


支撑间距 span

网格桥架承重能力（公斤/每米）

Loading Capability of dalong wire baskets(Kg/merter)

DLCM150网格桥架 丝径5mm DLCM150 wire diameter=5mm		安全承重数据 Safe work loading			
		支撑间距 Span			
高度 Height(mm)	宽度 Width(mm)	1.0m	1.5m	2.0m	3.0m
150	200	257	198	132	66
150	300	273	210	140	70
150	400	285	219	146	73
150	500	302	232	155	77
150	600	319	245	163	82
150	700	326	251	167	84
150	800	347	267	178	89

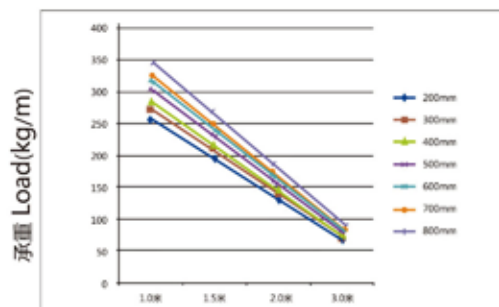

支撑间距 span

DLCM25系列网格桥架（高度=25mm）

DLCM25 Series Wire Mesh Cable Tray (Height=25mm)

名称 Part Number	高度 Height		宽度 Width		长度 Length		丝径 Dia	
命名规则 DLCM 高-宽-长-线径-表材	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch
DLCM25-50-3000-5-EZ	25	1	50	2	3000	118	5	0.2
DLCM25-75-3000-5-EZ	25	1	75	3	3000	118	5	0.2
DLCM25-100-3000-5-EZ	25	1	100	4	3000	118	5	0.2
DLCM25-150-3000-5-EZ	25	1	150	6	3000	118	5	0.2
DLCM25-200-3000-5-EZ	25	1	200	8	3000	118	5	0.2
DLCM25-300-3000-5-EZ	25	1	300	12	3000	118	5	0.2
DLCM25-400-3000-5-EZ	25	1	400	16	3000	118	5	0.2
DLCM25-450-3000-5-EZ	25	1	450	18	3000	118	5	0.2
DLCM25-500-3000-5-EZ	25	1	500	20	3000	118	5	0.2
DLCM25-600-3000-5-EZ	25	1	600	24	3000	118	5	0.2

DLCM高-宽-长-线径-表材的说明：

DLCM25:25mm高的网格桥架

宽：网络桥架的宽度，50mm~400mm

长：网络桥架的长度，300mm~3000mm

线径：3.5mm~6.0mm

DLCM25-50和DLCM25-75网络桥架底部2根丝的间距为25mm

表材：网格桥架的材料和表面处理，有以下几个选项：

EZ(碳钢表面冷镀锌, 锌层厚度 $\geq 12\mu\text{m}$)

HDG(碳钢表面热镀锌, 锌层厚度 $\geq 60\mu\text{m}$)



PC(碳钢表面冷镀后喷塑, 颜色由客户选择)

SS304(不锈钢304, 表面酸洗抛光)

SS316(不锈钢316, 表面酸洗抛光)

SS316L(不锈钢316L, 表面酸洗抛光)

宽 Width (mm)	截面图 Wire Count
50	
50	
75	
100	
150	
200	
300	
400	

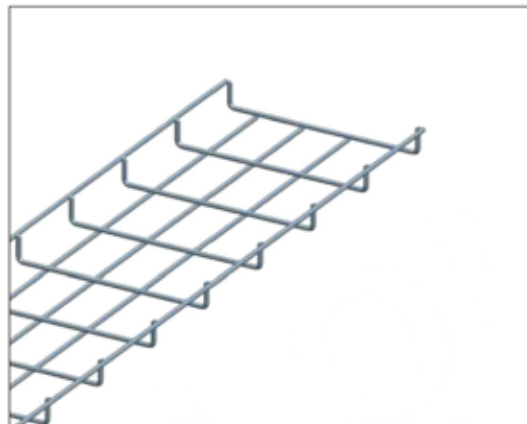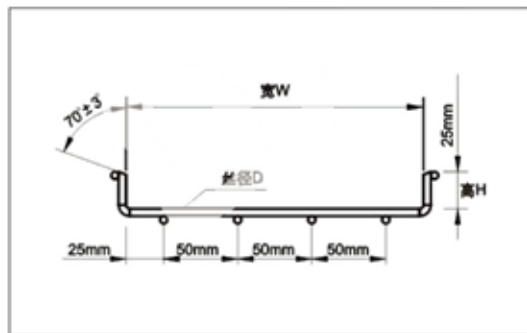

DLCM50系列网格桥架（高度=50mm）

DLCM50 Series Wire Mesh Cable Tray (Height=50mm)

名称 Part Number	高度 Height		宽度 Width		长度 Length		丝径 Dia	
命名规则 DLCM 高-宽-长-线径-表材	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch
DLCM50-50-3000-5-EZ	50	2	50	2	3000	118	5	0.2
DLCM50-75-3000-5-EZ	50	2	75	3	3000	118	5	0.2
DLCM50-100-3000-5-EZ	50	2	100	4	3000	118	5	0.2
DLCM50-150-3000-5-EZ	50	2	150	6	3000	118	5	0.2
DLCM50-200-3000-5-EZ	50	2	200	8	3000	118	5	0.2
DLCM50-300-3000-5-EZ	50	2	300	12	3000	118	5	0.2
DLCM50-400-3000-5-EZ	50	2	400	16	3000	118	5	0.2
DLCM50-450-3000-5-EZ	50	2	450	18	3000	118	5	0.2
DLCM50-500-3000-5-EZ	50	2	500	20	3000	118	5	0.2
DLCM50-600-3000-5-EZ	50	2	600	24	3000	118	5	0.2

DLCM高-宽-长-线径-表材的说明：

DLCM25:25mm高的网格桥架

宽：网络桥架的宽度，50mm~600mm

长：网络桥架的长度，300mm~3000mm

线径：3.5mm~6.0mm

DLCM50-50和DLCM50-75网络桥架底部2根丝的间距为25mm

表材：网格桥架的材料和表面处理，有以下几个选项：

EZ(碳钢表面冷镀锌, 锌层厚度 $\geq 12\mu\text{m}$)

HDG(碳钢表面热镀锌, 锌层厚度 $\geq 60\mu\text{m}$)



PC(碳钢表面冷镀后喷塑, 颜色由客户选择)

SS304(不锈钢304, 表面酸洗抛光)

SS316(不锈钢316, 表面酸洗抛光)

SS316L(不锈钢316L, 表面酸洗抛光)

宽 Width (mm)	截面图 Wire Count
50	
50	
75	
100	
150	
200	
300	
400	
450	
500	
600	

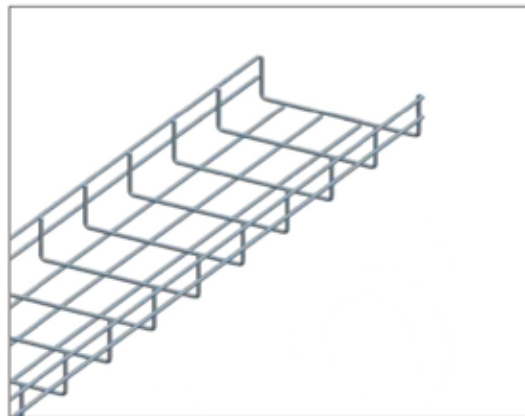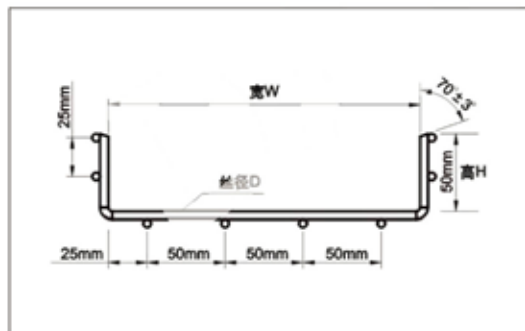

DLCM75系列网格桥架 (高度=75mm)

DLCM75 Series Wire Mesh Cable Tray (Height=75mm)

名称 Part Number	高度 Height		宽度 Width		长度 Length		丝径 Dia	
命名规则 DLCM 高-宽-长-线径-表材	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch
DLCM75-100-3000-5-EZ	75	3	100	4	3000	118	5	0.2
DLCM75-150-3000-5-EZ	75	3	150	6	3000	118	5	0.2
DLCM75-200-3000-5-EZ	75	3	200	8	3000	118	5	0.2
DLCM75-300-3000-5-EZ	75	3	300	12	3000	118	5	0.2
DLCM75-400-3000-5-EZ	75	3	400	16	3000	118	5	0.2
DLCM75-450-3000-5-EZ	75	3	450	18	3000	118	5	0.2
DLCM75-500-3000-5-EZ	75	3	500	20	3000	118	5	0.2
DLCM50-600-3000-5-EZ	75	3	600	24	3000	118	5	0.2

DLCM高-宽-长-线径-表材的说明：

DLCM75:75mm高的网格桥架

宽：网络桥架的宽度，100mm~600mm

长：网络桥架的长度，300mm~3000mm

线径：3.5mm~6.0mm

表材：网格桥架的材料和表面处理，有以下几个选项：

EZ(碳钢表面冷镀锌，锌层厚度 $\geq 12\mu\text{m}$)

HDG(碳钢表面热镀锌，锌层厚度 $\geq 60\mu\text{m}$)



PC(碳钢表面冷镀后喷塑，颜色由客户选择)

SS304(不锈钢304，表面酸洗抛光)

SS316(不锈钢316，表面酸洗抛光)

SS316L(不锈钢316L，表面酸洗抛光)

宽 Width (mm)	截面图 Wire Count
50	N/A
100	
150	
200	
300	
400	
450	
500	
600	

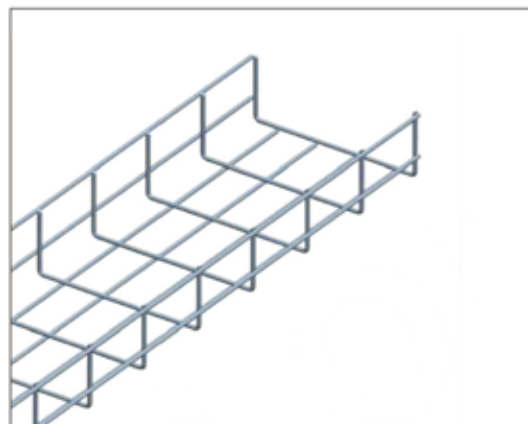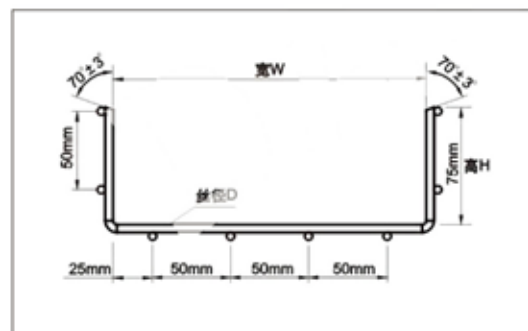

DLCM100系列网格桥架（高度=100mm）

DLCM100 Series Wire Mesh Cable Tray (Height=100mm)

名称 Part Number	高度 Height		宽度 Width		长度 Length		丝径 Dia	
命名规则 DLCM 高-宽-长-线径-表材	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch
DLCM100-100-3000-5-EZ	100	4	100	4	3000	118	5	0.2
DLCM100-150-3000-5-EZ	100	4	150	6	3000	118	5	0.2
DLCM100-200-3000-5-EZ	100	4	200	8	3000	118	5	0.2
DLCM100-300-3000-5-EZ	100	4	300	12	3000	118	5	0.2
DLCM100-400-3000-5-EZ	100	4	400	16	3000	118	5	0.2
DLCM100-450-3000-5-EZ	100	4	450	18	3000	118	5	0.2
DLCM100-500-3000-5-EZ	100	4	500	20	3000	118	5	0.2
DLCM100-600-3000-5-EZ	100	4	600	24	3000	118	5	0.2

DLCM高-宽-长-线径-表材的说明：

DLCM100:100mm高的网格桥架

宽：网络桥架的宽度，100mm~900mm

长：网络桥架的长度，300mm~3000mm

线径：3.5mm~6.0mm

表材：网格桥架的材料和表面处理，有以下几个选项：

EZ(碳钢表面冷镀锌，锌层厚度 $\geq 12\mu\text{m}$)

HDG(碳钢表面热镀锌，锌层厚度 $\geq 60\mu\text{m}$)



PC(碳钢表面冷镀后喷塑，颜色由客户选择)

SS304(不锈钢304，表面酸洗抛光)

SS316(不锈钢316，表面酸洗抛光)

SS316L(不锈钢316L，表面酸洗抛光)

宽 Width (mm)	截面图 Wire Count
50	N/A
100	
150	
200	
300	
400	
450	
500	
600	

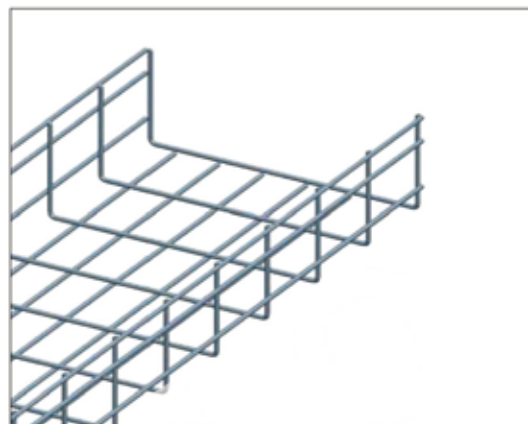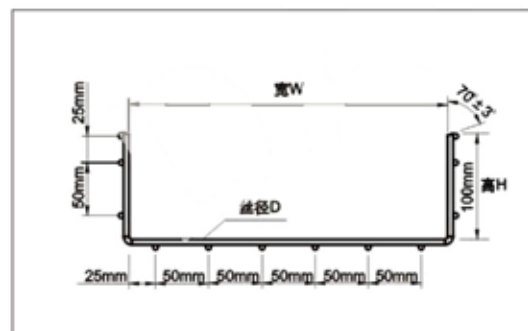

DLCM150系列网格桥架（高度=150mm）

DLCM150 Series Wire Mesh Cable Tray (Height=150mm)

名称 Part Number	高度 Height		宽度 Width		长度 Length		丝径 Dia	
命名规则 DLCM 高-宽-长-线径-表材	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch
DLCM150-150-3000-5-EZ	150	6	150	6	3000	118	5	0.2
DLCM150-200-3000-5-EZ	150	6	200	8	3000	118	5	0.2
DLCM150-300-3000-5-EZ	150	6	300	12	3000	118	5	0.2
DLCM150-400-3000-5-EZ	150	6	400	16	3000	118	5	0.2
DLCM150-450-3000-5-EZ	150	6	450	18	3000	118	5	0.2
DLCM150-500-3000-5-EZ	150	6	500	20	3000	118	5	0.2
DLCM150-600-3000-5-EZ	150	6	600	24	3000	118	5	0.2

DLCM高-宽-长-线径-表材的说明：

DLCM150:150mm高的网格桥架

宽：网络桥架的宽度，150mm~900mm

长：网络桥架的长度，300mm~3000mm

线径：3.5mm~6.0mm

表材：网格桥架的材料和表面处理，有以下几个选项：

EZ(碳钢表面冷镀锌，锌层厚度 $\geq 12\mu\text{m}$)

HDG(碳钢表面热镀锌，锌层厚度 $\geq 60\mu\text{m}$)



PC(碳钢表面冷镀锌后喷塑，颜色由客户选择)

SS304(不锈钢304，表面酸洗抛光)

SS316(不锈钢316，表面酸洗抛光)

SS316L(不锈钢316L，表面酸洗抛光)

宽 Width (mm)	截面图 Wire Count
50	N/A
100	N/A
150	
200	
300	
400	
450	
500	
600	

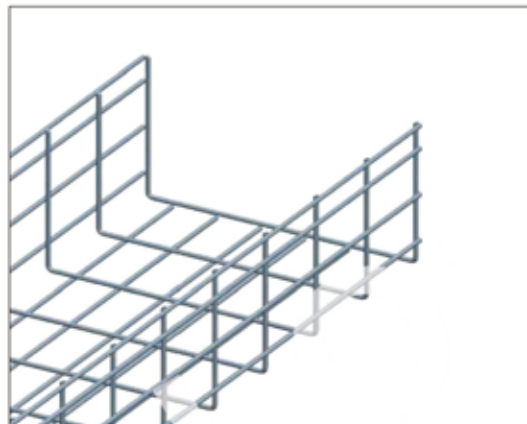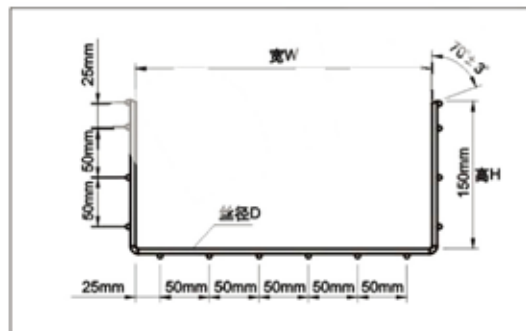

DLCM200系列网格桥架（高度=200mm）

DLCM200 Series Wire Mesh Cable Tray (Height=200mm)

名称 Part Number	高度 Height		宽度 Width		长度 Length		丝径 Dia	
命名规则 DLCM高-宽-长-线径-表材	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch	毫米 mm	英寸 Inch
DLCM200-200-3000-5-EZ	200	8	200	8	3000	118	5	0.2
DLCM200-300-3000-5-EZ	200	8	300	12	3000	118	5	0.2
DLCM200-400-3000-5-EZ	200	8	400	16	3000	118	5	0.2
DLCM200-450-3000-5-EZ	200	8	450	18	3000	118	5	0.2
DLCM200-500-3000-5-EZ	200	8	500	20	3000	118	5	0.2
DLCM200-600-3000-5-EZ	200	8	600	24	3000	118	5	0.2

DLCM高-宽-长-线径-表材的说明：

DLCM200:200mm高的网格桥架

宽：网络桥架的宽度，200mm~800mm

长：网络桥架的长度，300mm~3000mm

线径：3.5mm~6.0mm

表材：网格桥架的材料和表面处理，有以下几个选项：

EZ(碳钢表面冷镀锌，锌层厚度 $\geq 12\mu\text{m}$)

HDG(碳钢表面热镀锌，锌层厚度 $\geq 60\mu\text{m}$)



PC(碳钢表面冷镀锌后喷塑，颜色由客户选择)

SS304(不锈钢304，表面酸洗抛光)

SS316(不锈钢316，表面酸洗抛光)

SS316L(不锈钢316L，表面酸洗抛光)

宽 Width (mm)	截面图 Wire Count
50	N/A
100	N/A
150	N/A
200	
300	
400	
450	
500	
600	

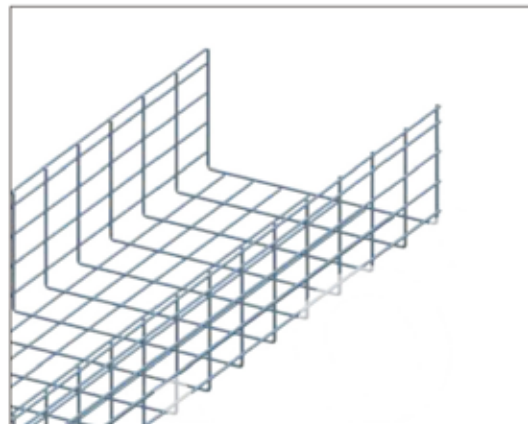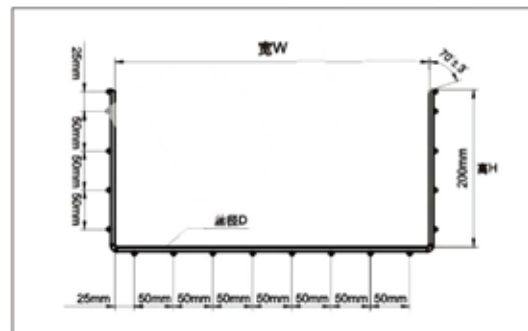

DLKITASSTR

名称：连接夹

Part Number: Conections Clip

描述

用于：(1) 两片网格桥架直段的连接；

(2) 转弯处的固定。

适合：3.5mm到6.0mm的丝径

包括：上卡扣×1、下卡扣×1、M6×20马车螺栓×1、

M6法兰螺母×1

特点：(1) 有较好的连接强度；

(2) 连接方便。

Description

Apply to: (1) Connect 2 straight sections of wire mesh cable tray;

(2) make bends fix.

Fit for: Diameter of wire from 3.5mm to 6.0mm

Include: DLKITASSTR-top×1,DLKITASSTR-bottom×1,

M6×20 Carriage bolt×1,M6 Flange nut×1

Feature: (1) Strong connection; (2) Easy connection



DLED275

名称：连接件

Part Number: Fittings

描述

用于：两片网格桥架直段的连接

适合：3.5mm到6.0mm的丝径

包括：DLED275×1、DLED25×3、M6×20马车螺栓×3、

M6法兰螺母×3

特点：有很高的连接强度

Description

Apply to: Connect 2 straight sections of wire mesh cable tray;

Fit for: Diameter of wire from 3.5mm to 6.0mm

Include: DLED275×1, DLED25×3, M6×20 Carriage bolt×3,

M6 Flange nut×3

Feature: Very strong connection



DLEZT90

名称：转弯加强条

Part Number: Corner Strength Bar

描述

用于：T型转弯件、十字型连接的制作

适合：3.5mm到6.0mm的丝径

包括：DLEZT90、DLCE25×3、M6×20马车螺栓×4、
M6法兰螺母×4

特点：(1) 有很高的连接强度；

(2) 固定方便。

Description


Apply to: Make T and Cross connectors

Fit for: Diameter of wire from 3.5mm to 6.0mm

Include: DLEZT90, DLCE25×3,

M6×20 Carriage bolt×4, M6 Flange nut×4

Feature: (1) Very strong connection; (2) Easy to install

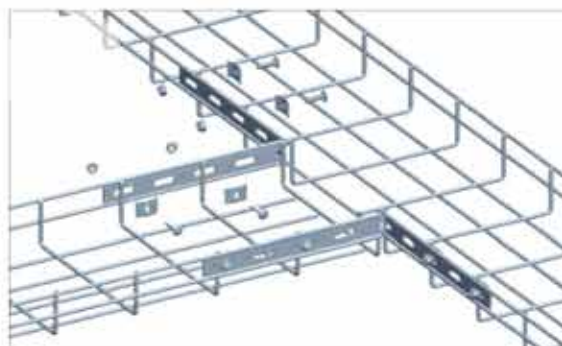

DLPA

名称：弯头连接件

Part Number: Elbow Fittings

描述

用于：T型转弯、十字型连接处的连接

适合：3.5mm到6.0mm的丝径

包括：DLPA×1、DLCE25×6、M6×20马车螺栓×6、
M6法兰螺母×6

特点：安装方便、美观

Description


Apply to: Make T and Cross connectors for wire mesh cable trays

Fit for: Diameter of wire from 3.5mm to 6.0mm

Include: DLPA×1, DLCE25×6,

M6×20 Carriage bolt×6, M6 Flange nut×6

Feature: Strong connection, Easy to instal, beautiful and practical

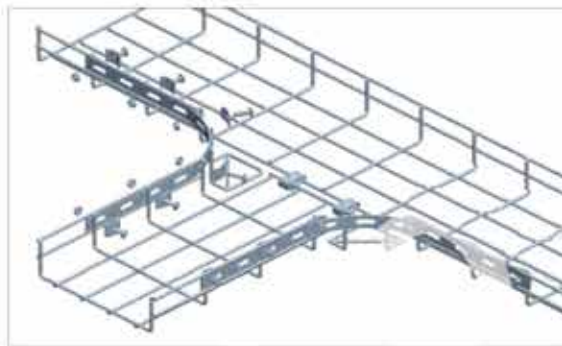

DLAJC

名称：内外弯加强条

Part Number: Adjustable Connector

描述

用于：内外、外弯、内外弯连接的加强

适合：3.5mm到6.0mm的丝径

包括：DLED275×2、DLCE25×4、M6×20马车螺栓×5、
M6法兰螺母×5

特点：提高连接强度，固定方便

Description


Apply to: Strengthen the connection of internal and
External bends of wire mesh cable tray

Fit for: Diameter of wire from 3.5mm to 6.0mm

Include: DLED275×2, DLCE25×4,

M6×20 Carriage bolt×5, M6 Flange nut×5

Feature: Improve the strength of connection, easy to fix

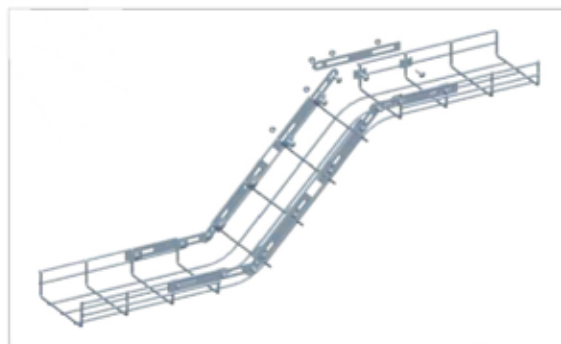

DLFASTLOCK

名称：弯通连接件

Part Number: Elbow Fittings

描述

用于：弯头的现场制作

适合：4.0mm到6.0mm的丝径

包括：独立件×1

特点：(1) 无螺栓连接；(2) 安装快速方便


Description

Apply to: Make bends

Fit for: Diameter of wire from 4.0mm to 6.0mm

Include: 1 unit

Feature: (1) Connection with no bolt; (2) Fast installation

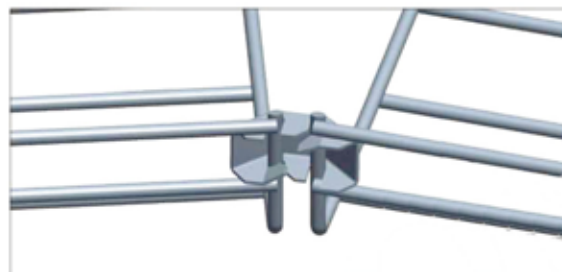

DLEDRN

名称：快速连接片

Part Number: Fast Fix Splicer

描述

用于：两片网格桥架直段的连接

适合：4.0mm到5.5mm的丝径

包括：独立件×1

特点：(1) 无螺栓连接;
(2) 安装快速方便。

Description

Apply to: Connect 2 straight sections of tray

Fit for: Diameter of wire from 4.0mm to 5.5mm

Include: 1 unit

Feature: (1) Connection with no bolt;
(2) Fast installation



DLCEFAS

名称：地板连接件

Part Number: Backplane Connectors

描述

用于：两片网格桥架直段底部的连接

适合：4.0mm到5.5mm的丝径

包括：独立件×1

特点：(1) 无螺栓连接;
(2) 安装快速方便。

Description

Apply to: Connect 2 straight sections of tray on bottom

Fit for: Diameter of wire from 4.0mm to 5.5mm

Include: 1 unit

Feature: (1) Connection with no bolt; (2) Fast installation



DLRCSN

名称：M型横档

Part Number: M Shape Bar

描述

用于：天花板下网格桥架的吊装

适合：4.0mm到6.0mm的丝径

包括：独立件×1 (可选配丝杆及螺母、膨胀等附件)

特点：可整条订货，自行切断



Description

Apply to: Hang bracket trays under ceiling .

Fit for: Diameter of wire from 4.0mm to 6.0mm

Include: 1 unit (rods and nuts are optional)

Feature: Can the whole order , to cut off

DLAS

名称：挂钩

Part Number: Handing Hooks


描述

用于：网格桥架的悬挂安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度不大于300mm。

包括：独立件×1 (可选配丝杆及螺母)

特点：轻巧、方便、成本低

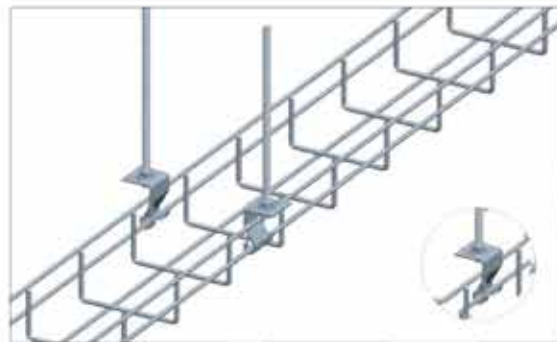

Description

Apply to: Hang trays under ceiling

Fit for: Diameter of wire from 3.5mm to 6.0mm ,

the width of tray should be less than 300mm

Include: 1 unit (rods and nuts are optional)

Feature: Economical and easy to install

DLTHR

名称：50吊钩

Part Number: 50 Tray Holder

描述

用于：50mm宽度网格桥架的悬挂安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度等于50mm。

包括：独立件×1 (可选配丝杆及螺母)

特点：轻巧、方便、成本低


Description

Apply to: Hang 50mm width trays under ceiling

Fit for: Diameter of wire from 3.5mm to 6.0mm ,
the width of tray is 50mm

Include: 1 unit (rods and nuts are optional)

Feature: Economical and easy to install

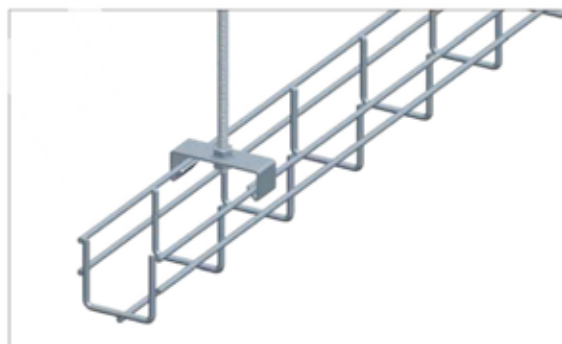

DLTHB

名称：T型吊顶支架

Part Number: T Type Hanging Bracket

描述

用于：将网格桥架垂直吊装在天花板下

适合：3.5mm到6.0mm的丝径，网格宽度100mm~600mm。

包括：独立件×1

特点：固定不晃动

Description

Apply to: Hang trays under ceiling vertically

Fit for: Diameter of wire from 3.5mm to 6.0mm,
Mesh width 100mm~600mm.

Include: 1 unit

Feature: No swing



DLCIB

名称：工字钢固定件

Part Number: Clip for I-Beam

描述

用于：工字钢、U型钢下网格桥架的吊装

适合：直径10mm到12mm的丝杆

包括：独立套件×1

特点：通用性强，承重性好


Description

Apply to: Installation of wire mesh cable tray under I-beam or U-channel

Fit for: Rod 10mm-12mm in Dia

Include: 1 unit

Feature: Strong commonality, bearing quality is good

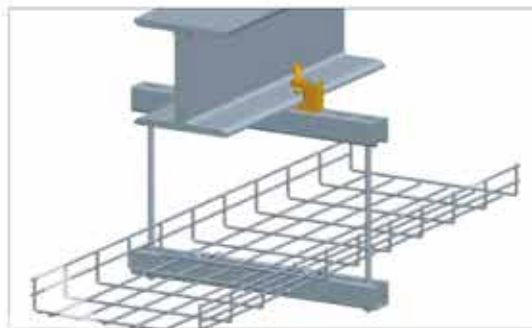

DLEFS

名称：机柜支架

Part Number: Cabinet Top Stand

描述

用于：在地面或机柜顶部安装网格桥架，高度可调节

适合：100mm到600mm的网格桥架，支撑高度为120mm或定制

包括：横档×1，支掌脚×2，紧固件一套

特点：整齐大方，承重好


Description

Apply to: Floor or cabinet top, the height can be adjustable

Fit for: Wire mesh cable tray from 100mm to 600mm, the height of bracket is 120mm or customized.

Include: Bar×1, Foot×2, a set of bolt and nut

Feature: Neat and easy, good bearing

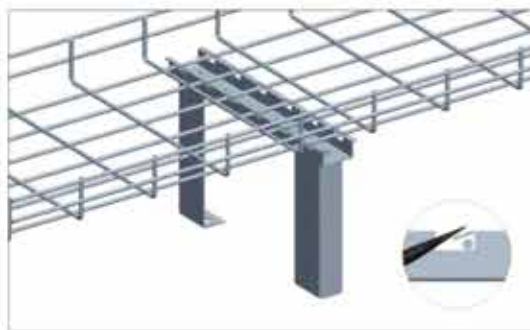

DLBTS

名称：桥式支架


Part Number: Bridge Type Stand

描述

用于：在地面或机柜顶部多层或单层安装网格桥架，高度可调节
适合：100mm到600mm宽的网格桥架，支撑高度默认300mm，也可定制
包括：支撑架×2、C型钢横档、压紧片组件×6、L型连接件×2
特点：可多层安装，可调节高度

Description

Apply to: Floor or top of the cabinet multi-or single installed mesh tray, height-adjustable.
Fit for: Wire mesh cable tray from 100mm to 600mm, the height of bracket is 300mm or customized.
Include: Support×2, C-Channel, HDC set×6, L-type connectoer×2
Feature: For multi-layers, Height adjustable

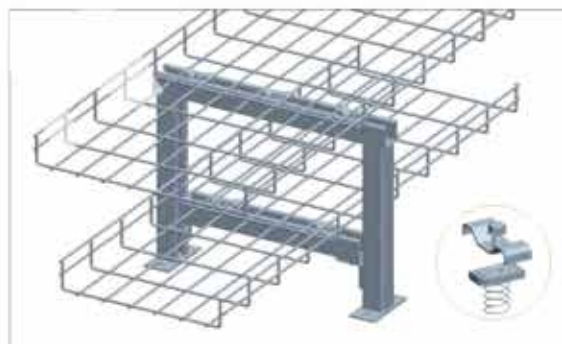

DLUC50

名称：50地装支架

Part Number: 50 Floor Stand

描述

用于：宽度50mm的网格桥架的地面安装或机柜顶部安装
适合：3.5mm到6.0mm的丝径，网格桥架的宽度等于50mm。
包括：独立件×1 (可选配膨胀螺母或螺栓螺母)
特点：轻巧、方便

Description

Apply to: Support 50mm trays on floor or top of cabinet
Fit for: Diameter from 3.5mm to 6.0mm, Width=50mm trays
Include: 1 unit (Optional expanding nut or bolt and nut)
Feature: Easy installation and low cost



DLR55

名称：100地装支架

Part Number: 100 Floor Stand

描述

用于：宽度100mm以上网格桥架的地面安装或机柜顶部安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度 $\geq 100\text{mm}$ 。

包括：独立件 $\times 1$ (可选配膨胀螺母或螺栓螺母)

特点：轻巧、方便

Description


Apply to: Support 100mm trays on floor or top of cabinet

Fit for: Diameter from 3.5mm to 6.0mm ,

Width $\geq 100\text{mm}$ trays

Include: 1 unit (Optional expanding nut or bolt and nut)

Feature: Easy installation and low cost

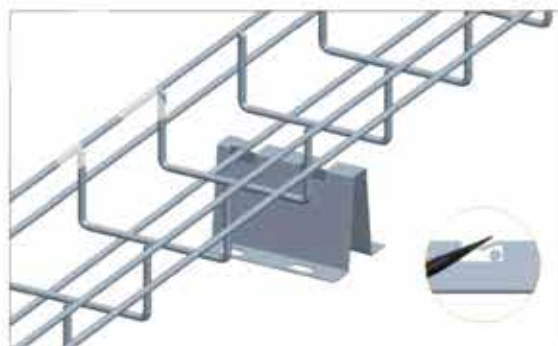

DLCM50

名称：“米”字扣

Part Number: Spider Buckle

描述

用于：网格桥架的地面安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度
从100mm至600mm。

包括：独立件 $\times 1$ (可选配膨胀螺母或螺栓螺母)

特点：轻巧、方便

Description


Apply to: Support trays on floor

Fit for: Diameter from 3.5mm to 6.0mm ,

Width from 100mm to 600mm

Include: 1 unit (Optional expanding nut or bolt and nut)

Feature: Easy installation and low cost

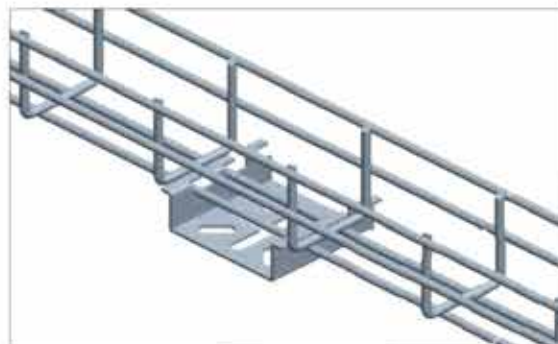

DLTWH100-300

名称：C型钢墙装支架

Part Number: C Steel Wall Mounting Bracket

描述

用于：网格桥架的侧墙安装

适合：网格桥架的宽度从100mm到300mm。

包括：独立套件×1, DLCE40×1

特点：强度大，适合100-300宽的网格桥架

Description

Apply to: Wall mount of wire mesh cable tray

Fit for: Width from 100mm to 300mm wire mesh cable trays

Include: Unit×1, DLCE40×1

Feature: High strength



DLTWH400-900

名称：C型钢三角档支架

Part Number: Triangle Wall Holder

描述

用于：网格桥架的侧墙安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度从400mm至900mm。

包括：独立套件×1, DLCE40×3

特点：支撑强度大，适合大宽度的网格桥架墙装

Description


Apply to: Wall mount of wire mesh cable tray

Fit for: Diameter from 3.5mm to 6.0mm ,

Width from 400mm to 900mm

Include: Unit×1, DLCE40×3

Feature: Strong supporting, suitable for big size wire mesh cable trays

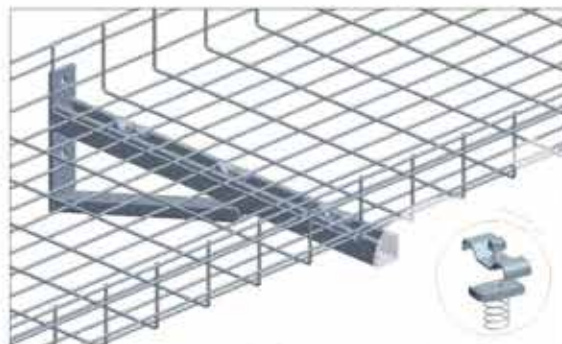

DLEWH

名称：末端墙装支架

Part Number: End Wall Holder

描述

用于：网格桥架尾端、顶端靠墙安装

适合：3.5mm到6.0mm的丝径，所有宽度的网格桥架

包括：T型墙装支架、M8弹簧螺母×1、DLCE40×1、
M8×20六角螺栓×1

特点：支撑强度大，适合所有宽度的网格桥架




Description

Apply to: Wall mount bracket for supporting the ends of wire mesh cable tray

Fit for: Diameter from 3.5mm to 6.0mm,
all widths of wire mesh cable trays.

Include: TWH×1, M8 Spring Nut×1, DLCE40×1,
M8×20 Bolt×1

Feature: For all widths of wire mesh cable trays.

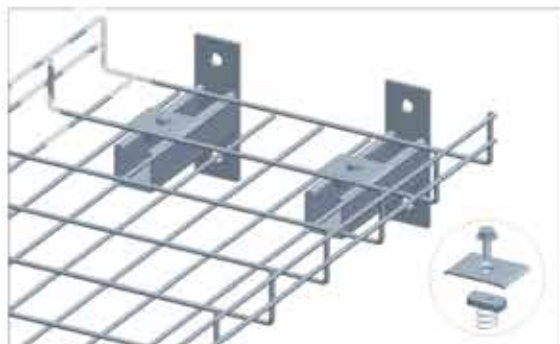

DLCRP100-300

名称：T型墙装支架

Part Number: T Wall Bracket


描述

用于：网格桥架的侧墙安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度
从100mm至300mm。

包括：独立套件×1、上卡扣×2、M6法兰螺母×2、
M6×20马车螺栓×2、

特点：支撑强度大，承重好

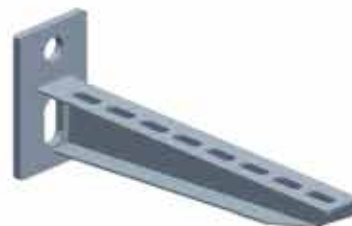


Description

Apply to: Wall mount of wire mesh cable tray

Fit for: Diameter from 3.5mm to 6.0mm ,
Width from 100mm to 300mm

Include: TWH×1, DLKITASSTR-top×2, M6 Flange nut×2
M6×20 Carriage bolt×2

Feature: Strong supporting, bearing quality is good

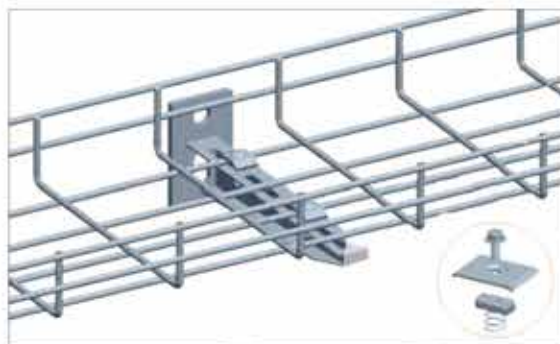

DLCU100-600

名称：三角板墙装支架

Part Number: Triangular Wall Bracket

描述

用于：网格桥架的侧墙安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度
从100mm至900mm。

包括：独立套件×1（配套的螺丝螺母可选）

特点：支撑强度大，适合所有宽度的网格桥架

Description

Apply to: Wall mount of wire mesh cable tray

Fit for: Diameter from 3.5mm to 6.0mm ,

Width from 100mm to 900mm

Include: Unit×1 (bolt and nut optional)

Feature: For all widths of wire mesh cable trays.



DLRFB

名称：倒旗式吊顶支架

Part Number: Returned Flag Bracket

描述

用于：将网格桥架吊装在天花板下

适合：3.5mm到6.0mm的丝径，网格桥架的宽度
从100mm至600mm。

包括：三角板支架×1、吊杆×1

特点：固定不晃动，高度可调节

Description


Apply to: Hange trays under ceiling

Fit for: Diameter from 3.5mm to 6.0mm ,

Width from 100mm to 600mm

Include: WBK×1, pole×1

Feature: No swing, Height adjustable

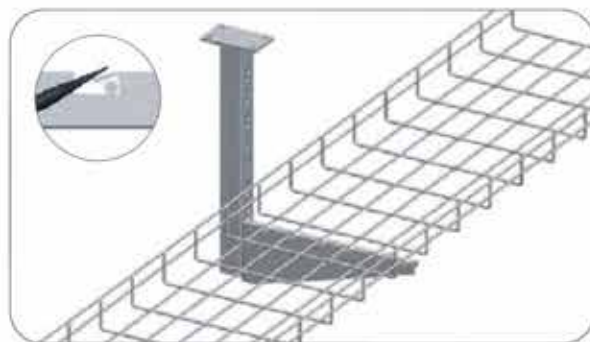

DLFFS

名称：旗式支撑支架

Part Number: Triangular Wall Bracket

描述

用于：网格桥架的地面安装

适合：3.5mm到6.0mm的丝径，网格桥架的宽度

从100mm至600mm。

包括：三角板支架×1、立柱×1（可选配膨胀螺母或螺栓螺母）

特点：可调节高度

Description

Apply to: Support trays on floor

Fit for: Diameter from 3.5mm to 6.0mm ,

Width from 100mm to 600mm

Include: WBK×1, Pole×1(Optional expanding nut or bolt and nut)

Feature: Height adjustable



DLCE40

名称：固定压板

Part Number: Fixed Clamp

描述

用于：网格桥架与机械设备、地面直接固定

适合：4.0mm到6.0mm的丝径

包括：独立套件×1

特点：安装方便、美观

Description

Apply to: Fix the wire mesh cable tray on machine,
floor directly

Fit for: Diameter from 4.0mm to 6.0mm ,

Include: Unit×1

Feature: Easy to install, beautiful and practical



DLDEV100

名称：下线板

Part Number: Offline Plate

描述

用于：网格桥架上线缆的引出

适合：3.5mm到6.0mm的丝径，宽度为150mm以上的网格桥架

包括：独立件×1

特点：保证电缆引出的弧度，安装方便，可随时增加

Description

Apply to: Output cables from trays

Fit for: Diameter from 3.5mm to 6.0mm ,
Width of trays $\geq 150\text{mm}$

Include: Unit×1

Feature: Keep the radian of cables, easy installation,
it can be increased any time.



DLCBR

名称：导弯器

Part Number: Cable Roller

描述

用于：线缆在转弯处不受损伤

适合：5.0mm到6.0mm的丝径，所有宽度的网格桥架

包括：独立套件×1

特点：保证电缆转弯时不会被转角刮损，通常用于动力
电缆的布放


Description

Apply to: Protect cables safe when turned.

Fit for: Diameter from 5.0mm to 6.0mm , all width of trays

Include: Unit×1

Feature: Keep protecting cables safe when turned,
it's used for laying of power cables.

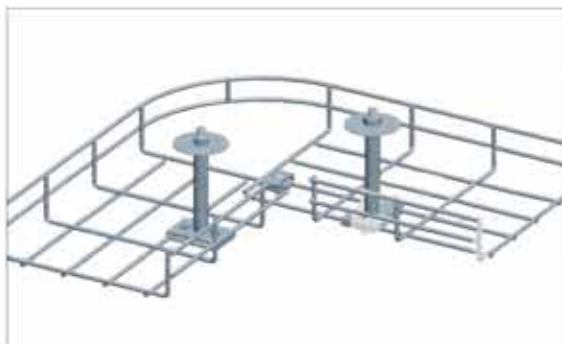

DLCOT

名称：隔板

Part Number: Partition

描述

用于：网格桥架中强电、弱电的电缆隔离

适合：3.5mm到6.0mm的丝径，所有宽度的网格桥架

包括：独立套件×1

特点：安装方便


Description

Apply to: Divide power cables and data cables

Fit for: Diameter from 3.5mm to 6.0mm ,
all width of trays

Include: Unit×1

Feature: Easy installation

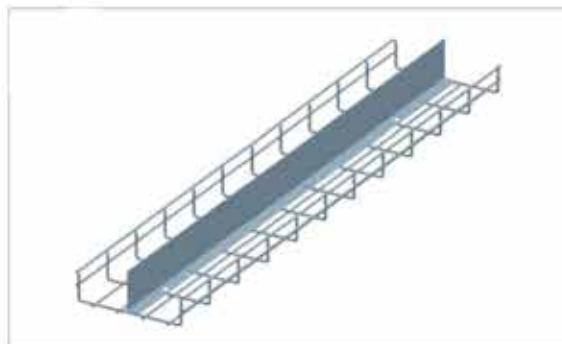

DLCOTJ

名称：隔板连接件

Part Number: Clip of Divider


描述

用于：2片隔板的连接

适合：所有规格的隔板

包括：独立套件×1

特点：安装方便、美观

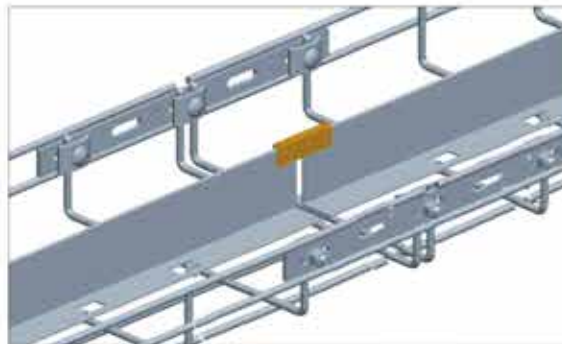

Description

Apply to: Connect 2 pieces of divider

Fit for: All Specifications of dividers

Include: Unit×1

Feature: Easy to install, beautiful and practical

DLCP

名称：盖板

Part Number: Cover

描述

用于：网格桥架顶部覆盖、防尘

适合：3.5mm到6.0mm的丝径，所有宽度的网格桥架

包括：独立套件×1

特点：安装方便


Description

Apply to: Cover trays to avoid dust

Fit for: Diameter from 3.5mm to 6.0mm ,
all width of trays

Include: Unit×1

Feature: Easy installation

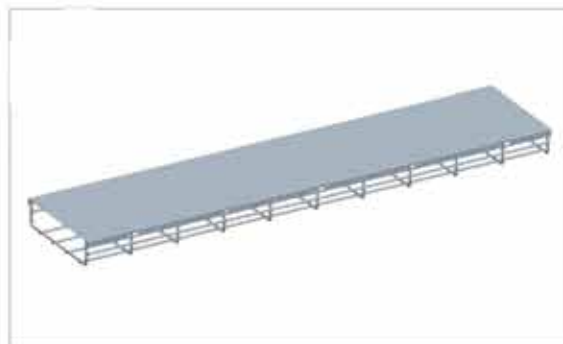

DLSP

名称：封板

Part Number: Seal Plate

描述

用于：网格桥架尾端的封闭

适合：3.5mm到6.0mm的丝径，所有宽度的网格桥架

包括：独立套件×1

特点：安装方便

Description

Apply to: Terminate trays

Fit for: Diameter from 3.5mm to 6.0mm ,
all width of trays

Include: Unit×1

Feature: Easy installation



DLCCP

名称：C型钢堵头

Part Number: C Channel Terminator

描述

用于：C型钢端口的封闭

适合：41×41mm的C型钢包括

包括：独立套件×1

特点：美观



Description

Apply to: Side cover of C-channel

Fit for: 41×41mm C-channel

Include: Unit×1

Feature: Beautiful and practical



DLCAP

名称：塑胶帽

Part Number: Rubber Cap

描述

用于：网格桥架的剪短外封闭

适合：4.0mm到6.0mm的丝径

包括：独立套件×1

特点：美观、保护电缆、施工安全



Description

Apply to: Cap the cut wire

Fit for: Diameter from 4.0mm to 6.0mm ,

Include: Unit×1

Feature: Safe and pretty



DLCDH

名称：出管板

Part Number: Pipe Board

描述

用于：网格桥架管道的连接，适合32mm、25mm、20mm的管道

适合：3.5mm到6.0mm的丝径

包括：独立套件×1

特点：安装方便、美观

Description

Apply to: Diameter of 32mm、25mm、20mm Pipe connection on the wire mesh cable trays

Fit for: Diameter from 3.5mm to 6.0mm

Include: Unit×1

Feature: Easy to install, beautiful and practical



DLBLF

名称：铜接地

Part Number: Copper Earthing Bolt

描述

用于：网格桥架的接地

适合：(A) 3.5mm到5.0mm的丝径，所有宽度的网格桥架

(B) 5.0mm到6.0mm的丝径，所有宽度的网格桥架

包括：独立套件×1

特点：接地美观、接触性好

Description


Apply to: Earth trays

Fit for: (A) Diameter from 3.5mm to 5.0mm

(B) Diameter from 5.0mm to 6.0mm

Include: Unit×1

Feature: Better earthing

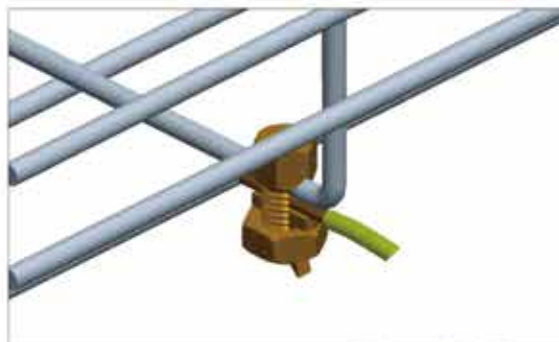

DLCFB

名称：铝合金固线器

Part Number: Aluminum Alloy Solid Line

描述

用于：DLCFB的底座，用于把固线器固定到网格桥架上

适合：所有的网格桥架和其他种类的桥架

包括：1组

特点：整理电缆，美观大方


Description

Apply to: Fix DLCFB to trays

Fit for: All trays

Include: Set×1

Feature: Settle cables, Beautiful

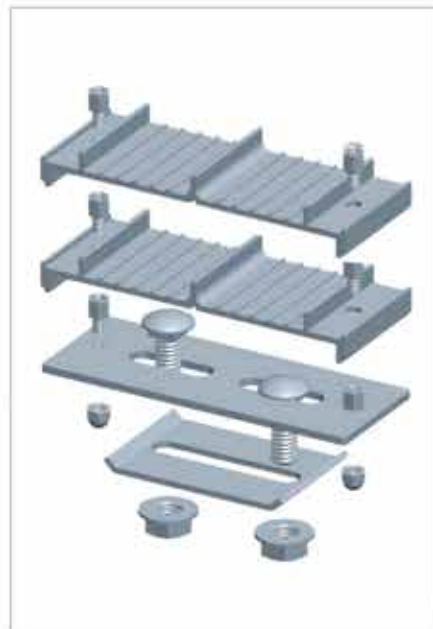

DLCFB

名称：塑料固线器

Part Number: Plastic Fixed-line Device

描述

用于：DLCFB的底座，用于把固线器固定到网格桥架上

适合：所有的网格桥架和其他种类的桥架

包括：1组

特点：整理电缆，美观大方

Description

Apply to: Fix DLCFB to trays

Fit for: All trays

Include: Set×1

Feature: Settle cables, Beautiful



DLCFT

名称：钢塑固线器

Part Number: Power Cable Fixer Top

描述

用于：动力电缆的分层固定

适合：固线器适用于11mm~60mm直径的电力电缆或光缆

包括：固线器×1，塑料垫层×n

特点：整理电缆，安装牢固

Description

Apply to: Fix laying the power cables

Fit for: Cables in diameter from 11mm to 60mm

Include: Unit×1, ABS nut×n

Feature: Settle cables, Solid installation



DLHDL

名称：连接片拉手

Part Number: Handle

描述

连接片拉手用于快速连接的安装和拆卸

Description

Handle is used to install or uninstall fast fix splicer



DLCUT

名称：大力钳

Part Number: Cutter






描述








大力钳用于剪断钢丝制作弯头








Description

Cutter is used to cut wires

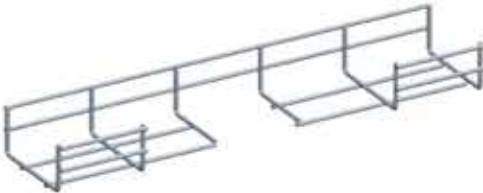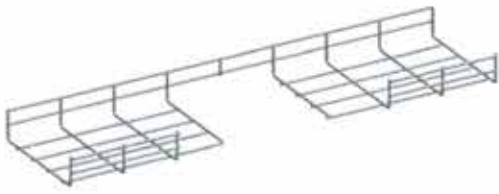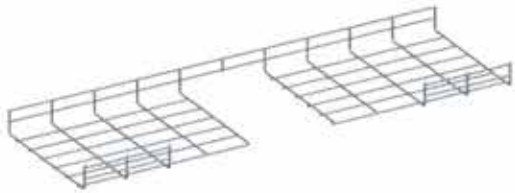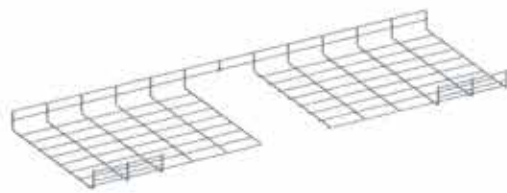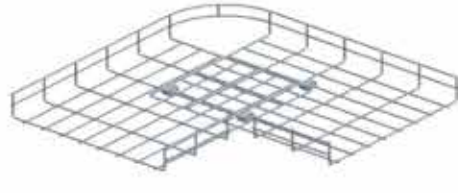


宽度 Width	剪切样式 Cut	成品样式 Bend
50mm		
100mm 150mm		
200mm		
300mm		
400mm 450mm		

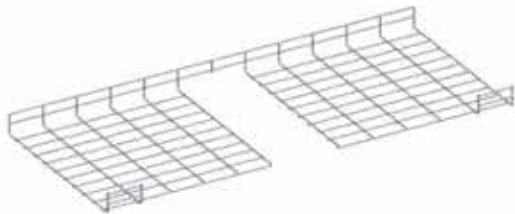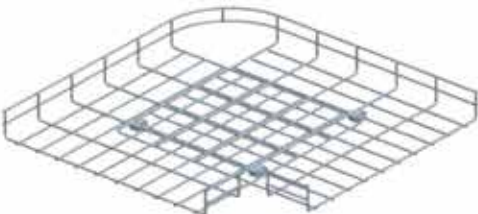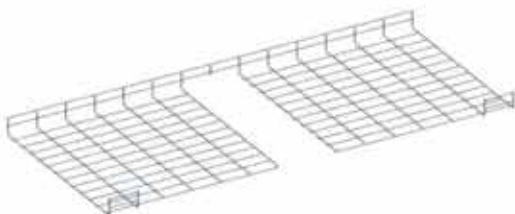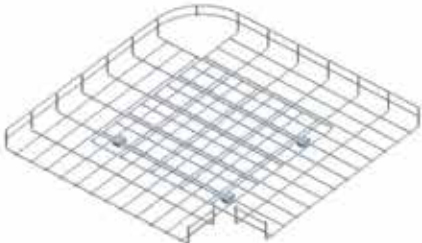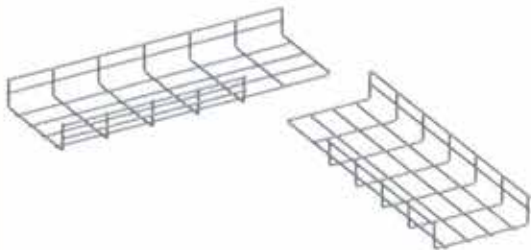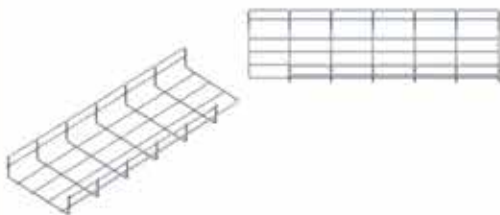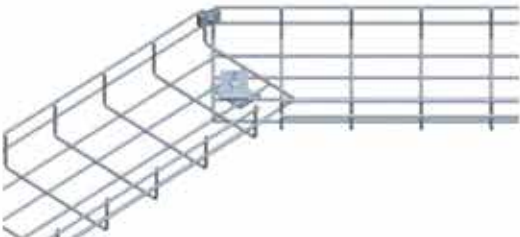宽度 Width	剪切样式 Cut	成品样式 Bend
500mm		
600mm		
T连接 T Connector		
拼角弯 Angle Joint		
90°大弧弯		

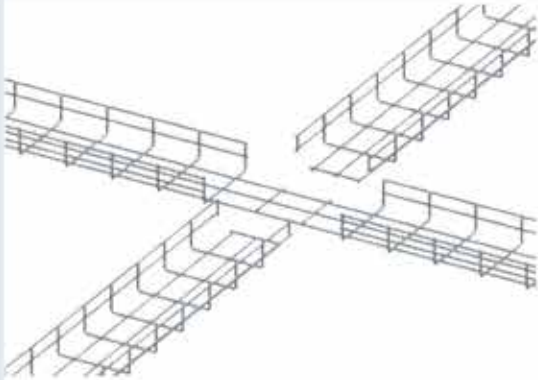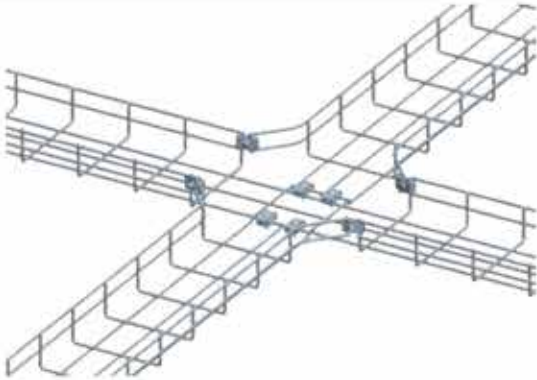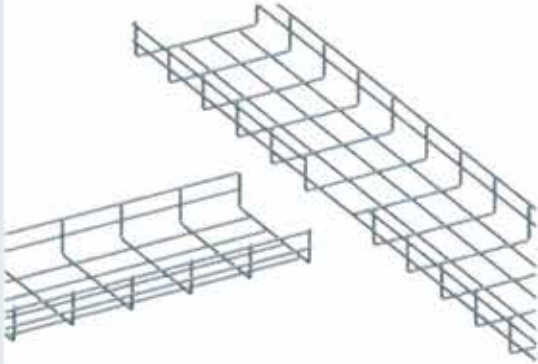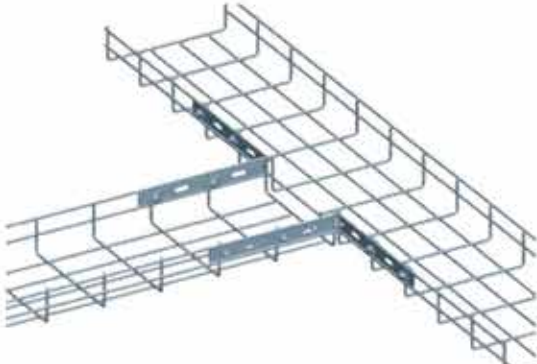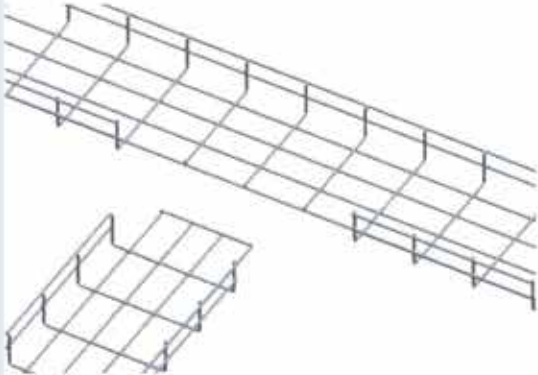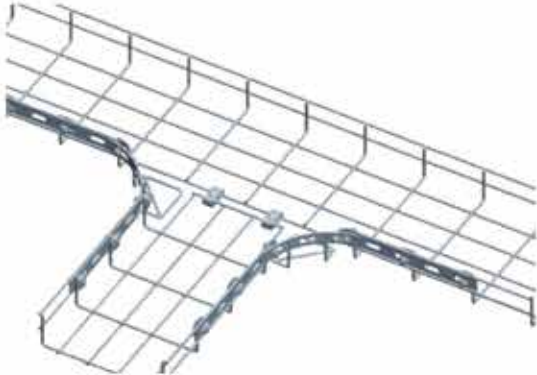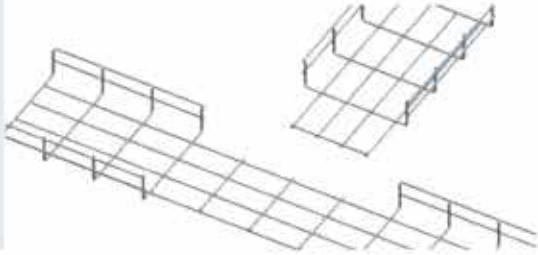
宽度 Width	剪切样式 Cut	成品样式 Bend
十连接 Cross Joint		
T连接 T Connector		
T连接 T Connector		
十连接 Cross Joint		

宽度 Width	剪切样式 Cut	成品样式 Bend
内弯 Internal Riser		
外弯 External Riser		
内外连续弯 Zigzag		
加强型连续弯 Zigzag with bar		
大变小		


焊接型90°弯-A Welded 90° bend-A

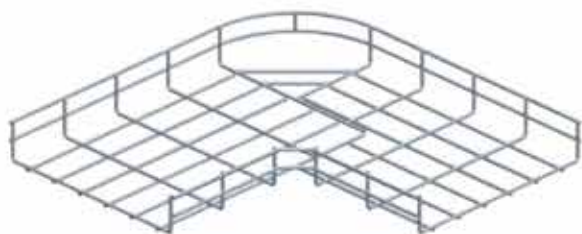


焊接型90°弯-B Welded 90° bend-B

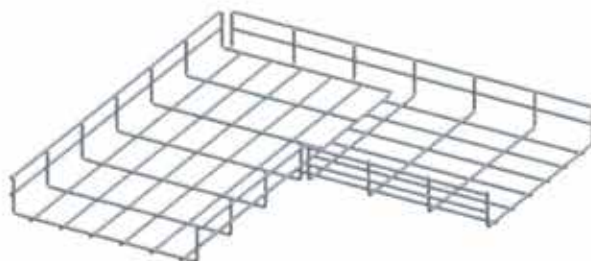


焊接型三通 Welded T

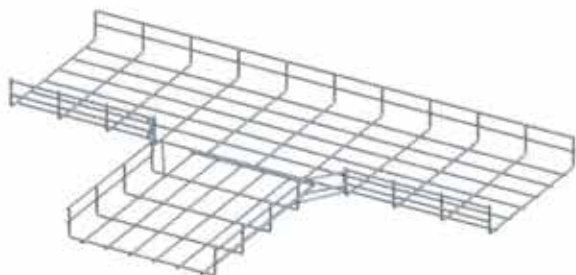

焊接型四通 Welded Cross

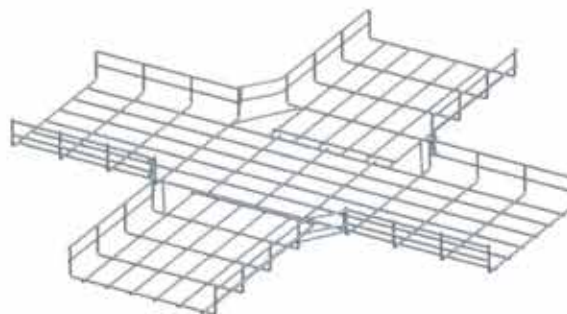

焊接型内弯 Welded Internal Riser

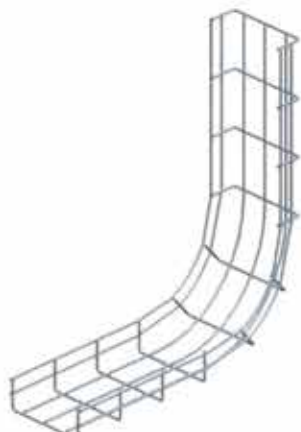

焊接型外弯 Welded External Riser







上海钦凯实业有限公司
Shanghai Qinkai Industrial Co.,Ltd
地址: 上海市金山区朱泾镇亭枫公路2318号
电话: 8621-67260026-802/808
手机: 8613774332258
传真: 8621-67260026
E-mail: sales@shqinkai.com
<https://shqinkai.en.alibaba.com>